
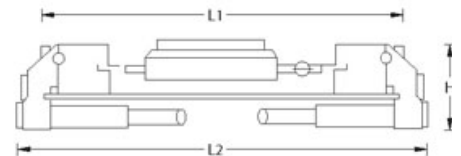


FLUORESCENCE
EXPLOSIONPROOF TYPE



EXPLOSIONPROOF TYPE

MODEL	LAMP	LUMEN (lm.)	DIMENSION (mm.)				HUB SIZE	WEIGHT (kg.)	COMPLETE SET/* (baht)	DIS %
			L1	L2	W	H				
HI-F XP4-120	1 x 18 W.T8	1300	593	668	265	210	3/4"	11.60	22,000	-
HI-F XP4-220	2 x 18 W.T8	1300	598	673	265	210	3/4"	15.70	26,000	-
HI-F XP4-140	1 x 36 W.T8	3250	1200	1350	265	210	3/4"	14.20	24,000	-
HI-F XP4-240	2 x 36 W.T8	3250	1200	1350	265	210	3/4"	18.70	28,000	-

*** สอบถามส่วนลด กรุณาติดต่อบริษัท ***

SPECIFICATION

HOUSING	COPPER FREE ALUMINIUM EXCEPT SHEET ALUMINIUM ALLOY
SURFACETREATMENT	ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
REFLECTOR	PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR
GUARD	STAINLESS STEEL
DIFFUSER	GLASS u201cPYREX u201d BRAND TUBING AND MADE IN USA., BIRROCILICATE GLASS, HEAT AND IMPACT RESISTANT
WIRES	THW, TIS.11-1988 STANDARD
LAMP HOLDER	ROTOR LOCKED TYPE HIGH-HEAT RESISTANT, TIS344-1987 STANDARD
BALLAST	ELECTRONIC BALLAST, HIGH POWER FACTOR (P.F.>0.95)
PROTECTION CLASS	PROTECTION CLASS EQUIVALENT TO IP 66/67 (ACC. TO EN60529/IEC60529), CLASS I, DIV.I,II GROUPS C, D, CLASS I, DIV.I,II GROUPS E, F, G, CLASS III
CERTIFICATION NUMBER	TIS 1955-1999, TIS 902-1989
COMPLIANCES	UL STANDARD 844, 1570, NEC. CLASS I, DIV.I,II GROUPS C, D, NEC. CLASS II, GROUPS E, F, G
INSTALLATION	SURFACE OR SUSPEND MOUNT
APPLICATION	USE INSIDE PAINT SPRAY BOOTHS WHERE HAZARDOUS FUMES, GASES, OIL REFINERIES, PETROCHEMICAL PLANTS, PAINT MANUFACTURING PLANTS FLOUR MILLS, AND PAINT RESIDUE ARE PRESENT THIS INCLUDES POEDER PAINT PROCESS AREAS.
COMPLETE SET*	INCLUDING ELECTRONIC BALLAST, LAMP